

2-CORE XLPE,SWA,HFFR SHEATHED CABLES AS PER QCS 2014

2C X 240 Sq.mm CU/XLPE/SWA/HFFR

International Designation: CU/XLPE/SWA/HFFR

Nexans Ref.: 22240SXZSHS30BS0

2-CORE XLPE,SWA,HFFR SHEATHED CABLES AS PER QCS 2014

DESCRIPTION

Scope

This specification covers two core, XLPE insulated cables for use on the Qatar Power Systems ,Street lightning and Small wiring systems. These cables are complying with BS 6724 and QCS 2014 Standards .

Design

1. Conductor

Plain annealed high-conductivity Stranded Copper Class 2 conforming to BS EN 60228

2. Insulation

XLPE insulation Type GP8 conforming to BS 7655-1

3. Filling or Bedding

Extruded HFFR

4. Armour

Single layer of Galvanised Steel Wires (GSAW)

5. Outer Sheath


Halogen Free Flame Retardant (HFFR)

- Flame retardant : IEC60332-3-24 CAT C

- Colour : Black

Marking

2 X 240 CU/XLPE/SWA/HFFR 600/1000 V BS 6724 MADE IN QATAR QICC-
NEXANS Years Meters

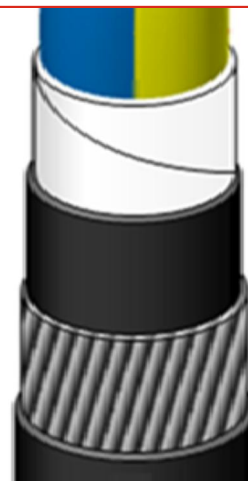

STANDARDS

International
IEC 60332-3-24 Cat.C

National BS 6724



Conductor flexibility
Stranded class 2



Halogen free
Yes



Rated Voltage Uo/U (Um)
0.6/1 kV



Max.conductor temp.in service
90 °C



Bending factor when laying
12 (xD)



Flame retardant
Yes

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 1/19/22 www.nexans.qa Page 1 / 2

QICC

A NEXANS COMPANY

2-CORE XLPE,SWA,HFFR SHEATHED CABLES AS PER QCS 2014

2C X 240 Sq.mm CU/XLPE/SWA/HFFR

CHARACTERISTICS

Construction characteristics

| | |
|-----------------------|------------------------------|
| Conductor material | Copper |
| Conductor shape | Circular |
| Conductor flexibility | Stranded class 2 |
| Armour type | Galvanized steel wires |
| Colour | Black |
| Core identification | Red,Black |
| Halogen free | Yes |
| Inner sheath | Halogen free flame retardant |
| Insulation | XLPE |
| Outer sheath | Halogen free flame retardant |

Dimensional characteristics

| | |
|------------------------------|---------------------|
| Number of cores | 2 |
| Conductor cross-section | 240 mm ² |
| Approximate weight | 7466 kg/km |
| Nominal armour wire diameter | 2.5 mm |
| Nominal insulation thickness | 1.8 mm |
| Nominal outer diameter | 54.3 mm |

Electrical characteristics

| | |
|---|---------------|
| Rated Voltage U _o /U (U _m) | 0.6/1 kV |
| Max. DC resistance of the conductor at 20°C | 0.0754 Ohm/km |
| Permissible current rating in open air | 546 A |
| Permissible current rating when buried | 375 A |
| Thermal soil resistivity dry zone | 2.5 °K.m/W |
| Voltage drop, 3 conductors | 0.21 V/A.km |

Usage characteristics

| | |
|--|----------------------|
| Max. conductor temperature in service | 90 °C |
| Short-circuit max. conductor temperature | 250 °C |
| Bending factor when laying | 12 (xD) |
| Ambient air temperature | 30 °C |
| Ambient ground temperature | 20 °C |
| Laying depth, center of system | 700 mm |
| Max. pulling force during laying | 50 N/mm ² |
| Flame retardant | Yes |